

# Invacare® Action<sup>3</sup> Junior® Evolutive

Please contact Invacare EU Export Customer Services on :-  
 Tel : +33 247 626980 ; Email : serviceclient\_export@invacare.com  
 Or visit our website : www.invacare.eu.com



## Invacare® Action<sup>3</sup> Junior® Evolutive

Manual folding wheelchair with telescopic crossbar, from 18 months



### Description :

- Weight : strating at 15 kg
- Max user weight : 80 kg
- Warranty period 2 years excluding wear parts



Date :

Purchase order :







customer code :













Dealer stamp :






Please make your selection with a cross in the box      ◆ Standard feature      ○ Free of charge

CODE	DESCRIPTION	NC : Not Compatible NC : 9999 : Non Conformance with Option 9999	Euros
CNC0030	<input type="checkbox"/> ACTION 3 JUNIOR EVOLUTIVE - FIXED BACKREST		912,04
CNC0035	<input type="checkbox"/> ACTION 3 JUNIOR EVOLUTIVE - FOLDING BACKREST		912,04
CNC0040	<input type="checkbox"/> ACTION 3 JUNIOR EVOLUTIVE - RECLINING BACKREST		912,04
<b>PROPULSION TYPE</b>			
CNC0100	<input type="checkbox"/> SELF PROPULSION		◆
<b>SEAT</b>			
<b>SEAT WIDTH - SHORT TELESCOPE (ONLY COMPATIBLE WITH SHORT TELESCOPIC WIDTH)</b>			
SHORT TELESCOPIC CROSSBAR: FOR 205 TO 280 MM WIDTH (NC: 0170, 0171, 0480, 0520, 0530, 0570, 0580, 0600, 0620, 0890, 0900, 1375) - DELIVERED WITH 2 FOOTPLATES EXCEPT FOR 205 AND 230 MM WIDTH - SERIAL STABILIZER KIT			
CNC0140	<input type="checkbox"/> 205 mm	NC : 0360, 0490, 0492, 0495, 0511, 0513, 0561, 0563	○
CNC0141	<input type="checkbox"/> 230 mm	NC : 0360, 0490, 0492, 0495, 0511, 0513, 0561, 0563	○
CNC0142	<input type="checkbox"/> 255 mm	NC : 0495, 0511, 0513, 0561, 0563	○
CNC0143	<input type="checkbox"/> 280 mm	NC : 0495, 0511, 0513, 0561, 0563	○
<b>SEAT DEPTH - SHORT TELESCOPE</b>			
SHORT TELESCOPIC CROSSBAR: FOR 200 TO 350 MM WIDTH (BY ADDING EXENSIONS)			
CNC0160	<input type="checkbox"/> ADJUSTABLE SEAT DEPTH 200 TO 250 MM - DELIVERED 230 MM	NC : 1030, 1364	○
CNC0161	<input type="checkbox"/> ADJUSTABLE SEAT DEPTH 250 TO 300 MM - DELIVERED 280 MM	NC : 1364	○
CNC0162	<input type="checkbox"/> ADJUSTABLE SEAT DEPTH 300 TO 350 MM - DELIVERED 330 MM		○
<b>SEAT WIDTH - LONG TELESCOPE (ONLY COMPATIBLE WITH WITH LONG TELESCOPE DEPTH )</b>			
LONG TELESCOPIC CROSSBAR FOR 305 TO 380 MM WIDTH - (NC: 0160, 0161, 0162)			
CNC00150	<input type="checkbox"/> 305 mm	NC : 0490, 0520, 0570, 0890	○
CNC00151	<input type="checkbox"/> 330 mm	NC : 0490, 0530, 0580, 0900	○
CNC00152	<input type="checkbox"/> 355 mm	NC : 0490, 0530, 0580, 0900	○
CNC00153	<input type="checkbox"/> 380 mm	NC : 0360, 0490, 0492, 0495, 0530, 0580, 0900	○
<b>SEAT DEPTH- LONG TELESCOPE</b>			
LONG TELESCOPIC CROSSBAR : FOR 275 TO 325 MM DEPTH			
CNC170	<input type="checkbox"/> ADJUSTABLE SEAT DEPTH 275 TO 325 MM		○
CNC171	<input type="checkbox"/> ADJUSTABLE SEAT DEPTH 325 TO 375 MM		○

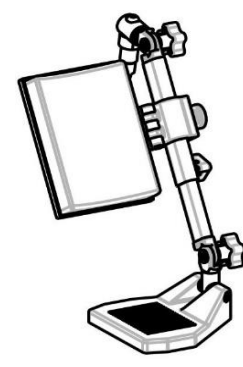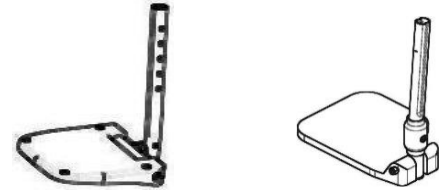

SEAT HEIGHT			
CNC0260	<input type="checkbox"/>	460 MM	◆
CNC0270	<input type="checkbox"/>	435 MM	○
CNC0280	<input type="checkbox"/>	410 mm	○
			NC : 0505, 0555
			NC : 0505, 0555, 1375, 1430
SEAT UPHOLSTERY TYPE			
CNC0335	<input type="checkbox"/>	NYLON WITH LOOP BANDS SEAT UPHOLSTERY WIDTH AND DEPTH ADJUSTABLE	◆
SEAT CUSHION			
CNC0362	<input type="checkbox"/>	SEAT CUSHION MSS (ESSENTIAL JUNIOR)	90,05
 0362			
BACKREST			
BACKREST TYPE			
CNC0380	<input type="checkbox"/>	FIXED 7° BACKREST - 3 HEIGHTS: 370/400/430 MM - DELIVERED AT 370 MM (SW 205 TO 280 MM) AT 400 MM (SW 305 TO 380 MM)	◆
CNC0390	<input type="checkbox"/>	RECLINING (RATCHET) 0/30° BACKREST - 5 HEIGHTS: 350/370/390/410/430 MM - DELIVERED AT 370 MM (SW 205 TO 280 MM) AT 390 MM (SW 305 TO 380 MM) W/O BACKBRACE	◆
CNC0395	<input type="checkbox"/>	RECLINING (GAS SPRING) 0/30° BACKREST - 400 MM HEIGHT W/O BACKBRACE	○
CNC0400	<input type="checkbox"/>	FOLDING BACKREST - 3 HEIGHTS: 370/400/430 MM- DELIVERED AT 370 MM (SW 205 TO 280 MM) AT 400 MM (SW 305 TO 380 MM)	◆
CNC0420	<input type="checkbox"/>	FOLDING BACKREST - 400 MM HEIGHT; HEIGHT ADJUSTABLE PUSHHANDLE (100 MM)	154,50
CNC0425	<input type="checkbox"/>	FIXED 7° BACKREST - 400 MM (WITH 0475) 430 MM (WITH 0480) HEIGHT; HEIGHT ADJUSTABLE PUSHHANDLE (150 MM)	154,50
 0475			
 0480			
BACKREST UPHOLSTERY TYPE			
CNC0475	<input type="checkbox"/>	WIDTH & HEIGHT ADJUSTABLE NYLON SLING TYPE	◆
CNC0480	<input type="checkbox"/>	CONTOUR (TENSION) ADJUSTABLE NYLON TYPE	151,66
CNC0490	<input type="checkbox"/>	MATRX MINI BACK, 260 MM TALL (Kid*ab*ra OUTER COVER) - USER WEIGHT 68KG MAXI	519,43
CNC0492	<input type="checkbox"/>	MATRX MINI BACK, 310 MM TALL (Kid*ab*ra OUTER COVER) - USER WEIGHT 68KG MAXI	519,43
CNC0495	<input type="checkbox"/>	MATRX MINI BACK, 360 MM TALL (Kid*ab*ra OUTER COVER) - USER WEIGHT 68KG MAXI	519,43
 <b>Matrx Mini</b>			
HANGERS/FOOTPLATES			
HANGERS RH TYPE (HEIGHT ADJ. BY STEP OF 10 MM)			
CNC0505	<input type="checkbox"/>	90° STRAIGHT RH REMOVABLE HANGER - UL STD 125 TO 260 MM	○
CNC0510	<input type="checkbox"/>	80° SHORT RH SWING IN/OUT HANGER - 0° STANDARD POSITION; UL STD 220 TO 320 MM	○
CNC0511	<input type="checkbox"/>	80° SHORT RH SWING IN/OUT HANGER - 30° ABDUCTION POSITION; UL STD 220 TO 320 MM	○
CNC0512	<input type="checkbox"/>	80° LONG RH SWING IN/OUT HANGER - 0° STANDARD POSITION; UL STD 300 TO 450 MM	◆
CNC0513	<input type="checkbox"/>	80° LONG RH SWING IN/OUT HANGER - 30° ABDUCTION POSITION; UL STD 300 TO 450 MM	○
CNC0520	<input type="checkbox"/>	ELEVATING LEGREST (0° TO 80°) RH SWING IN/SWING OUT HANGER (INCLUDING CALFPAD); UL STD 275 TO 375 MM -	100,25
CNC0530	<input type="checkbox"/>	ELEVATING LEGREST (0° TO 80°) RH SWING IN/SWING OUT HANGER (WITHOUT CALFPAD, WITH CALFSTRAP); UL STD 235 TO 295 MM -	100,25
 0505 / 0555			
 0510 / 0560			
HANGERS LH TYPE (HEIGHT ADJ. BY STEP OF 10 MM)			
CNC0555	<input type="checkbox"/>	90° STRAIGHT LH REMOVABLE HANGER - UL STD 125 TO 260 MM	○
CNC0560	<input type="checkbox"/>	80° SHORT LH SWING IN/OUT HANGER - 0° STANDARD POSITION; UL STD 220 TO 320 MM	○
CNC0561	<input type="checkbox"/>	80° SHORT LH SWING IN/OUT HANGER - 30° ABDUCTION POSITION; UL STD 220 TO 320 MM	○
CNC0562	<input type="checkbox"/>	80° LONG LH SWING IN/OUT HANGER - 0° STANDARD POSITION; UL STD 300 TO 450 MM	◆

CNC0563	<input type="checkbox"/>	80° LONG LH SWING IN/OUT HANGER - 30° ABDUCTION POSITION; UL STD 300 TO 450 MM	NC : 0611, 0630, 0881	○	 0520 / 0530
CNC0570	<input type="checkbox"/>	ELEVATING LEGREST (0° TO 80°) LH SWING IN/SWING OUT HANGER (INCLUDING CALFPAD); UL ST 275 TO 375 MM -	NC : 0611, 0620, 0880, 0886	100,25	
CNC0580	<input type="checkbox"/>	ELEVATING LEGREST (0° TO 80°) LH SWING IN/SWING OUT HANGER (WITHOUT CALFPAD, WITH CALFSTRAP); UL STD 235 TO 295 MM -	NC : 0611, 0620, 0880, 0886	100,25	
<b>FOOTPLATES RH TYPE</b>					
CNC0600	<input type="checkbox"/>	FLIP UP RH FOOTPLATE	NC : 0875, 0886	◆	 0605      0610
CNC0605	<input type="checkbox"/>	FLIP UP, ANGLE & DEPTH ADJUSTABLE RH FOOTPLATE		○	
CNC0610	<input type="checkbox"/>	FLIP UP AND ANGLE ADJUSTABLE RH FOOTPLATE	NC : 0875, 0886	○	
CNC0611	<input type="checkbox"/>	ONE PIECE FOOTBOARD	NC : 0620, 0625, 0630, 0875	60,66	
<b>FOOTPLATES LH TYPE</b>					
CNC0620	<input type="checkbox"/>	FLIP UP LH FOOTPLATE	NC : 0886	◆	 0611
CNC0625	<input type="checkbox"/>	FLIP UP, ANGLE & DEPTH ADJUSTABLE LH FOOTPLATE		○	
CNC0630	<input type="checkbox"/>	FLIP UP AND ANGLE ADJUSTABLE LH FOOTPLATE	NC : 0875, 0886	○	
<b>ARMRESTS</b>					
<b>ARMRESTS RH FORM</b>					
CNC0640	<input type="checkbox"/>	REMOVABLE RH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED DESK, STD ARMPAD (60 MM) ADJ. 180 TO 250 MM	NC : 0745, 0746, 0750, 0755	◆	 0640 / 0740
CNC0645	<input type="checkbox"/>	REMOVABLE RH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED JUNIOR, STD ARMPAD (60 MM) ADJ. 150 TO 250 MM	NC : 0740, 0746, 0750, 0755	○	
CNC0646	<input type="checkbox"/>	REMOVABLE RH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED NARROW ARMPAD JUNIOR (50 MM) ADJ. 150 TO 250 MM	NC : 0740, 0745, 0750, 0755	○	 0650 / 0750
CNC0650	<input type="checkbox"/>	MUDGUARD RH HEIGHT ADJUSTABLE (155 TO 220 MM)	NC : 0740, 0745, 0746, 0755, 1471, 1472	○	
CNC0655	<input type="checkbox"/>	SKIRTGUARD RH JUNIOR	NC : 0740, 0745, 0746, 0750, 1471, 1472	○	
<b>ARMRESTS LH FORM</b>					
CNC0740	<input type="checkbox"/>	REMOVABLE LH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED DESK, STD ARMPAD (60 MM) ADJ. 180 TO 250 MM		◆	 0645 / 0745
CNC0745	<input type="checkbox"/>	REMOVABLE LH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED JUNIOR, STD ARMPAD (60 MM) ADJ. 150 TO 250 MM		○	
CNC0746	<input type="checkbox"/>	REMOVABLE LH (N°1) AUTOLOCK SAFETY DEVICE INCLUDED NARROW ARMPAD JUNIOR (50 MM) ADJ. 150 TO 250 MM	NC : 0750, 0755	○	 0655 / 0755
CNC0750	<input type="checkbox"/>	MUDGUARD LH HEIGHT ADJUSTABLE (155 TO 220 MM)	NC : 1471, 1472	○	
CNC0755	<input type="checkbox"/>	SKIRTGUARD LH JUNIOR	NC : 1471, 1472	○	
<b>SEATING OPTIONS TYPE</b>					
CNC0860	<input type="checkbox"/>	HEADREST STANDARD MULTI - ADJUSTABLE INCLUDING WIDTH ADJUSTABLE BACKBRACE	NC : 0865, 0866	◆	 0866
CNC0865	<input type="checkbox"/>	HEADREST ROUND MULTI - ADJUSTABLE INCLUDING WIDTH ADJUSTABLE BACKBRACE	NC : 0866	265,40	
CNC0866	<input type="checkbox"/>	MATRIX MINI ELAN HEADREST (HEAD PAD 150 MM WIDE) ONLY AVAILABLE WITH MATRIX BACKRESTS USER WEIGHT 68KG MAXI	NC: 0860, 0865 and only compatible with <b>Matrix</b> folder	466,35	 0868
CNC0868	<input type="checkbox"/>	MATRIX LATERAL SUPPORT, FIXED (PAIR) ONLY AVAILABLE WITH MATRIX BACKRESTS USER WEIGHT 68KG MAXI		236,02	
CNC0875	<input type="checkbox"/>	ADJUSTABLE CALF STRAP		165,88	 0875
CNC0880	<input type="checkbox"/>	FRONT STABILISER KIT + 100 MM OUTWARD		9,48	
CNC0881	<input type="checkbox"/>	ANKLE GRIPS BRACKET, PAIR		52,13	 0860
CNC0886	<input type="checkbox"/>	FOOTPLATE ADJUSTMENT OPTIMIZER KIT (FRONT OR REAR SET ADJUSTMENT)		45,50	
CNC0890	<input type="checkbox"/>	ADDITIONAL ELEVATING LEGREST (0° TO 80°) SWING IN/OUT HANGER PAIR (INCL. ADJ FOOTPLATES); UL STD 275 TO 375 MM	NC : 0900	200,49	 0865
CNC0900	<input type="checkbox"/>	ADDITIONAL ELEVATING LEGREST (0° TO 80°) SWING IN/OUT HANGER PAIR (INCL. ADJ FOOTPLATES, WITHOUT CALFPADS, WITH CALFSTRAPS); UL STD 235 TO 295 MM		200,49	

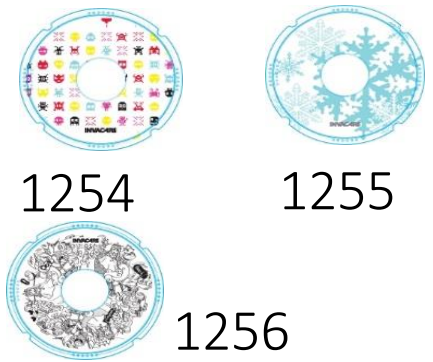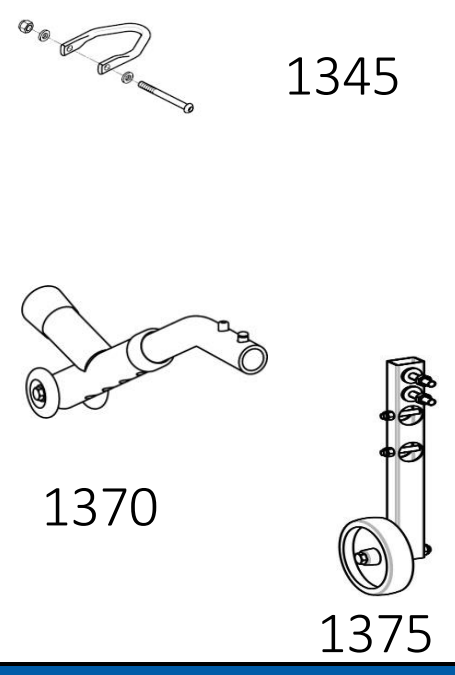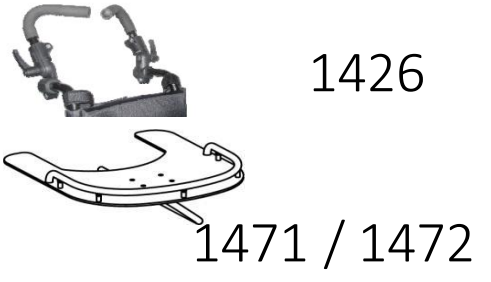COLOURS				
CNC0952	<input type="checkbox"/>	PEARL WHITE		○
CNC0953	<input type="checkbox"/>	MATT BLACK		○
CNC0954	<input type="checkbox"/>	MATT RED		○
CNC0955	<input type="checkbox"/>	INTENSE YELLOW		○
CNC0956	<input type="checkbox"/>	POLAR BLUE		○
CNC0957	<input type="checkbox"/>	CANDY PINK		○
CNC0959	<input type="checkbox"/>	NAVY BLUE		○
CNC0991	<input type="checkbox"/>	SPECIAL COLOUR (ON DEMAND ONLY)		On demand
				
FRONT WHEELS				
CNC0999	<input type="checkbox"/>	125 X 30 MM (5" x 1") BLACK SOLID TYRE		◆
CNC1001	<input type="checkbox"/>	125 X 25 MM (5" x 1") FLASHING LIGHTS SOLID TYRE		63,51
CNC1007	<input type="checkbox"/>	125 X 40 MM (5"x 1" 3/4) BLACK SOLID TYRE		34,12
REAR WHEELS				
REAR WHEEL SIZE				
CNC1020	<input type="checkbox"/>	20" - 515 mm	NC : 1040, 1050	○
CNC1030	<input type="checkbox"/>	22" - 560 mm	NC : 1045	◆
REAR WHEEL TYPE				
CNC1040	<input type="checkbox"/>	STANDARD ( BLACK HUB, COLORLESS RIM & ZINC PLATTED SPOKES )	NC : 1280	◆
CNC1045	<input type="checkbox"/>	REINFORCED (COLORLESS HUB, CLEAR ANODIZED RIM & STAINLESS STEEL SPOKES)	NC : 1280	○
CNC1050	<input type="checkbox"/>	DRUM BRAKE (22" : COLORLESS HUB, CLEAR ANODIZED RIM & STAINLESS STEEL SPOKES)	NC : 1270, 1275	○
REAR WHEEL TYRE				
CNC1120	<input type="checkbox"/>	TYRES SOLID BLACK (1"3/8)		◆
CNC1130	<input type="checkbox"/>	PNEUMATIC PROFILED BLACK (1"3/8)		○
HANDRIM TYPE				
CNC1140	<input type="checkbox"/>	ALUMINIUM PRE-ANODIZED HANDRIM		◆
CNC1141	<input type="checkbox"/>	HANDRIM COATED IN BLACK ANTI-SLIP PLASTIC		127,01
REAR WHEELS AXLE TYPE				
CNC1180	<input type="checkbox"/>	QUICK RELEASE AXLE		◆
REAR WHEELS POSITION				
CNC1190	<input type="checkbox"/>	STANDARD REAR WHEELS POSITION ; 25MM FRONTWARD/BACKREST CANE AXLE		◆
CNC1195	<input type="checkbox"/>	MEDIUM REAR WHEELS POSITION ; ON LINE/BACKREST CANE AXLE		○
CNC1200	<input type="checkbox"/>	PASSIVE REAR WHEELS POSITION ; 25MM BACKWARD/BACKREST CANE AXLE		○
CNC1201	<input type="checkbox"/>	DUAL AMPUTEE REAR WHEELS POSITIONS ; TRANSIT=75MMBACKWARD/BACKREST CANE AXLE, ADJUSTABLE TO 50MM & SELF PROP=60MM BACKWARD/BACKREST CANE AXLE, ADJUSTABLE TO 85MM	NC : 1275, 1280, 1375	148,82
				
CHASSIS OPTIONS TYPE				
CNC1253	<input type="checkbox"/>	SPOKE GUARDS CLEAR PAIR		○
CNC1254	<input type="checkbox"/>	SPOKE GUARDS PIXEL; PAIR		○
CNC1255	<input type="checkbox"/>	SPOKE GUARDS SNOWFLAKES; PAIR		○
CNC1256	<input type="checkbox"/>	SPOKE GUARDS COLOR ME!; PAIR		○
				
BRAKES TYPE				
CNC1270	<input type="checkbox"/>	PUSH TO LOCK BRAKES		◆
CNC1275	<input type="checkbox"/>	PULL TO LOCK BRAKES		○
CNC1280	<input type="checkbox"/>	ATTENDANT HUB BRAKES (INC PUSH TO LOCK)	NC : 1426	178,20
SAFETY OPTIONS TYPE				
CNC1345	<input type="checkbox"/>	TRANSPORTATION BRACKETS		24,64
CNC1362	<input type="checkbox"/>	BODYPOINT POSTURE BELT 2 POINTS, SMALL 110 mm x 25 MM		
CNC1364	<input type="checkbox"/>	BODYPOINT POSTURE BELT 2 POINTS, MEDIUM 140 mm x 40 MM		
CNC1370	<input type="checkbox"/>	REAR ANTI-TIPPERS PAIR WITH TIPPING AID	NC : 1430	87,20
CNC1375	<input type="checkbox"/>	TRANSFER KIT (100 MM (4") WHEELS)		67,30
CNC1380	<input type="checkbox"/>	REFLECTORS KIT (FOR SPOKE WHEELS ONLY)		38,86
CNC1390	<input type="checkbox"/>	BRAKE EXTENSION PAIR		10,43
				
OTHERS OPTIONS				
CNC1426	<input type="checkbox"/>	STROLLER PUSH HANDLES PAIR		204,74
CNC1430	<input type="checkbox"/>	RH TIPPING AID		42,65
CNC1471	<input type="checkbox"/>	RH SWING AWAY ACRYLIC TRAY		281,52
CNC1472	<input type="checkbox"/>	LH SWING AWAY ACRYLIC TRAY		281,52
				


RAMPS			
1440530	<input type="checkbox"/>	<b>Folding mono ramp, fiberglass</b> Folded dimensions: 2000 x 820 mm 16,3 kg - max. load : 300 kg	1 787,68
1654128	<input type="checkbox"/>	<b>2-part telescopic Basic Ramp, aluminum</b> and anti-slipping material. Folded dimensions: 1210 x 194 mm. 8,8 kg (pair) - max. load : 270 kg	402,84
1654129	<input type="checkbox"/>	<b>3-part telescopic compact Quick2go Ramp, aluminum</b> and anti-slipping material Folded dimensions: 870 x 237 mm 13,6 kg (pair) - max. load: 260 kg	805,69
1654130	<input type="checkbox"/>	<b>Folding mono ramp, aluminum</b> Folded dimensions: 1824 x 714 mm 13,9 kg - max. load: 300 kg	426,54




1440530



1654128



1654129

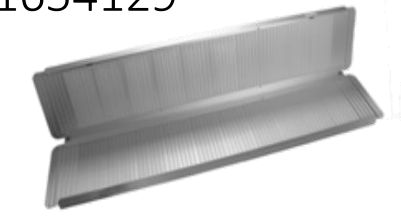

1654130